


AlpiKord05 Range 1 – Lacquered Multilaminar Wood Veneer

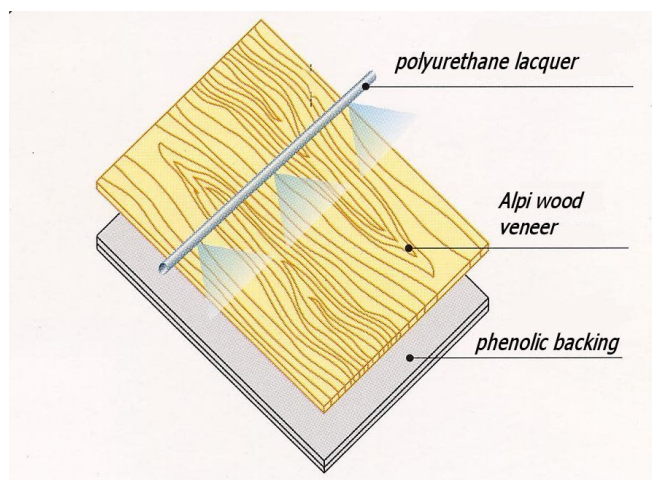

Technical specifications

WAX EFFECT FINISH	Results	Norms
Nominal thickness	0.5 mm	EN 438-2.4
Grade (145°C-288 F)	Postformable	EN 438-2.21
Bending radius		
- longitudinal	6 mm	
- transversal	15 mm	
Weight	0.5 Kg/sqm	
Dimensional variations:		EN 438-2.9
- longitudinal	0.4 %	
- transversal	1.2 %	
Abrasion resistance	> 80 Taber rev.	EN 438-2.6
Boiling water resistance	moderate effect	EN 438-2.7
High temp resistance (180°)	evident effect	EN 438-2.8
Stain resistance:		EN 438-2.15
- acetone, trichloroethylene	no effect	
- group 2,3,4 – procedure A	no effect	
Lightfastness (Xenotest)	> 3 grey scale	UNI 9427
Formaldehyde emission	according to the rule	EN 717-2